



XT FOOD



TUTTI - ALL

160/15
180/18
200/15
200/21






MODULA PLUS - XT FOOD

IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA
PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

MODULA PLUS - IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA

- Struttura chiusa e realizzata in acciaio inox AISI 304
 - Pompe a bielle con pistoni in ceramica, testata in ottone e guarnizioni per alta temperatura (mod. MODULA PLUS) - pompa per alta temperatura serie HT - 85°C (mod. XT FOOD)
 - Motore 1450 rpm
 - Protezione termica del motore
 - Motore ad alto rendimento
 - Trasmissione con giunto flessibile (FJ)
 - Controllo macchina ACDS
 - Controllo perdite
 - Spegnimento automatico per mancanza d'uso dopo 20 min
 - Led segnalazione «macchina pronta» e «anomalia»
 - Memorizzazione del tempo di utilizzo della macchina con segnalazione led al raggiungimento del periodo di manutenzione programmata
 - Idropistola con giunto girevole in alta pressione (swivel) e prolunga atermica
 - Manometro
 - Filtro acqua ispezionabile
 - Tubo alta pressione da m 15 antimacchia
 - Predisposizione per staffa aggancio rapido a muro (optional)
 - Predisposizione per controllo remoto (optional)
 - Predisposizione per avvolgitubo (optional)
- *Enclosed frame constructed in stainless steel AISI 304*
 - *Triplex plunger pump with three brass head and high temperature seals (mod. MODULA PLUS) - high temperature pump HT series - 85°C (mod. XT FOOD)*
 - *1450 rpm motor*
 - *High efficiency motor*
 - *Motor thermal protection*
 - *Motor/pump equipped with flexible joint (FJ)*
 - *(ACDS) Advanced Control Delayed Stop*
 - *High pressure swivel gun with heat proof extension*
 - *Micro leakage control*
 - *Automatic shutdown if idle for more than 20 min*
 - *Warning led "machine ready" and "malfunction"*
 - *Hour counter device with service alert warning led*
 - *Pressure gauge*
 - *Easy to inspect water filter*
 - *15 m non-marking high pressure hose*
 - *Predisposed for optional quick hook-up wall bracket*
 - *Predisposed for optional with remote control*
 - *Hose reel (optional)*

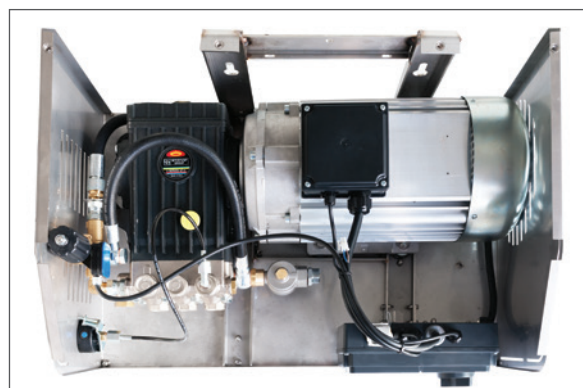





ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES


		N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION
		1	Tutti-All	01AC422	Idropistola con Semilancia e swivel (in M22 out M22) Spray gun with Semilance and swivel (in M22 out M22)
2	Tutti-All	01AC419	Lancia INOX l=70 cm (in M22 out 1/4" F) Stainless steel lance l=70 cm (in M22 out 1/4" F)		
3	130/10	I50276	Ugello Nozzle 1/4" M 25035		
	200/15	I50284	Ugello - Nozzle 1/4" M 25045		
	160/15	I50216	Ugello - Nozzle 1/4" M 2505		
	180/18	I50307	Ugello - Nozzle 1/4" M 2506		
	160/30	I50218	Ugello - Nozzle 1/4" M 2510		
	200/21	I50295	Ugello - Nozzle 1/4" M 25065		
4	MODULA PLUS 130/10 - 160/15 180/18	01AC381	Tubo A.P. l=15 m R1 - 5/16" M22 - M22 H.P. hose l=15 m R1 - 5/16" M22 - M22		
	MODULA PLUS 200/15-200/21-160/30 XT FOOD 160/15	01AC425	Tubo A.P. l=15 m R2 - 5/16" M22 - M22 H.P. hose l=15 m R2 - 5/16" M22 - M22		
5	Tutti-All		Chiave Key		

ACCESSORI A RICHIESTA / ACCESSORIES ON DEMAND

AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L max =30 m STAINLESS STEEL AISI 304 HOSE REEL L max = 30 m	CONTROLLO REMOTO REMOTE CONTROL	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT
 <p>Avvolgitubo alta pressione inox 30 m Stainless steel high pressure hose reel Cod. 01AC443</p>	 <p>kit controllo remoto con l=15 m di cavo Remote control kit with cable l= 15 m Cod. 01AC441</p>	 <p>Mod. Tutti-All Lancia-Lance (70 cm) Cod. 01AC514</p>
		<p>Mod. 160/15 Ugello-Nozzle (05) Cod. 01AC296</p>
		<p>Mod. 130/10 Ugello-Nozzle (035) Cod. 01AC293</p>
		<p>Mod. 180/18 Ugello-Nozzle (06) Cod. 01AC348</p>
		<p>Mod. 200/15 Ugello-Nozzle (045) Cod. 01AC295</p>
		<p>Mod. 200/21 Ugello-Nozzle (065) Cod. 01AC297</p>

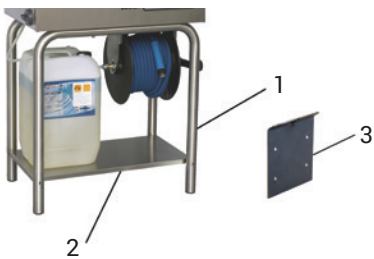MODULA PLUS - IDROPULITRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

SUPPORTI SUPPORTS	SUPPORTO INOX STAINLESS STEEL RACK
	
Mod. Tutti - All supporto inox - stainless-steel support Cod. 01AC446	Mod. Tutti - All Cod. 01AC510
Mod. Tutti - All ripiano inox - stainless-steel shelf Cod. B.CRDS00815	
Mod. Tutti - All piastra aggancio rapido a parete - bracket for quick mounting on wall Cod. B.CRDS00814	
PIEDINI ANTIVIBRANTI RUBBER FEET	UNITA' RISCALDANTE HEATING UNIT
	
Piedini antivibranti per installazione a terra o su ripiano Rubber feet for shelf or floor installation Cod. B.KTSP00013	Vedi pag 81 - See page 81

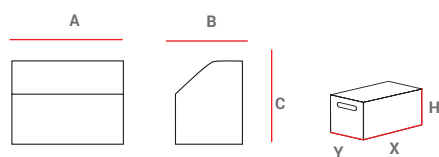

MOD	PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE			IMBALLO PACKAGING				
	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MODULA PLUS 130/10	720	460	360	65	780	540	610	76
MODULA PLUS 160/15	720	460	360	69	780	540	610	80
MODULA PLUS 180/18	720	460	360	77	780	540	610	88
MODULA PLUS 200/15	720	460	360	77	780	540	610	88
MODULA PLUS 200/21	720	460	360	82	780	540	610	93
MODULA PLUS 160/30	720	460	360	95	780	540	610	105
MODULAXTFOOD160/15	720	460	360	74	780	540	610	85

		130/10	160/15	180/18	200/15	200/21	160/30	XT FOOD 160/15
codice - code		● 01PF80	● 01PF81	● 01PF82	● 01PF83	● 01PF84	● 01PF131	● 01PF111
pressione mas. - max. pressure	[bar] [MPa - psi]	130 13-1.880	160 16-2.300	180 18-2.600	200 20-2.900	200 20-2.900	160 16-2.300	160 16-2.300
portata mas. - max. flow rate	[lt/h]	600	900	1.080	900	1.260	1.800	900
pompa - pump		IP E2	IP 47	IP 47	IP 47	IP 47 N	IP 47	IP 47 HT
sistema di arresto - stop system		ACDS	ACDS	ACDS	ACDS	ACDS	ACDS	ACDS
rotazione pompa - pump speed	[rpm]	1.450	1.450	1.450	1.450	1.450	1.450	1.450
potenza assorbita max - max. absorbed power	[Kw]	3	5	7,2	7,2	9,3	9,9	5
alimentazione - supply voltage	[V - ph - Hz]	230-1-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50
massima temp. aliment. - max. inlet temp.	[°C]	40	70	70	70	70	70	85